



MW-3232 / Engine Dynamometer



Example Model Shown
(Image may not depict all standard
included components)

MW-3232 Eddy Current Dynamometer

Specifications

Power:	2,000 hp (1,491 kW)
Max Torque at Base Speed:	10,504 lb-ft (14,242 Nm)
Base Speed:	1,000 rpm
Max. Speed:	3,000 rpm
Construction Type:	Dry Gap
Rotor Inertia:	4,646 lb-ft ² (195.78 kg-m ²)
Coolant Required at Max. Power:	200 gpm (757 lpm)
Coolant Inlet (Min-Max):	55-100 psi (378-689 kPa)
Coolant Inlet Temperature Max:	90°F (32.2°C)
Shipping Weight (estimate):	18,000 lb (8,165 kg)
Companion Flange / Hub Pattern:	1910 - US Customary
Coil Voltage / Hot Amperage:	250V / 7.82 amps
Rotation:	bi-directional

Recommended Accessories

- Driveshaft - 1910
- Torsional Coupling - 1910
- Flywheel Adapter Plate Kit
- Driveshaft Guard
- Sub-Base Kit
- Engine Cart
- Air or Electric Starter
- Engine Cooling Column
- Charge Air Cooler
- Water Recirculating System

Everything you need to succeed

Optional Accessories



Optional Manual Shaft Lock



Optional Closed Loop Cooling Center



Optional Charge Air Cooler



Optional Driveshaft Guard



Optional Engine Cart


Various Facility Support Systems and Services Available



Bulk Fuel Storage and Distribution



Coolant Storage and Distribution



Water Recirculation




Design, Project & Construction Management Services




Commissioning, Start-up & Training

MW-3232 (US Customary)

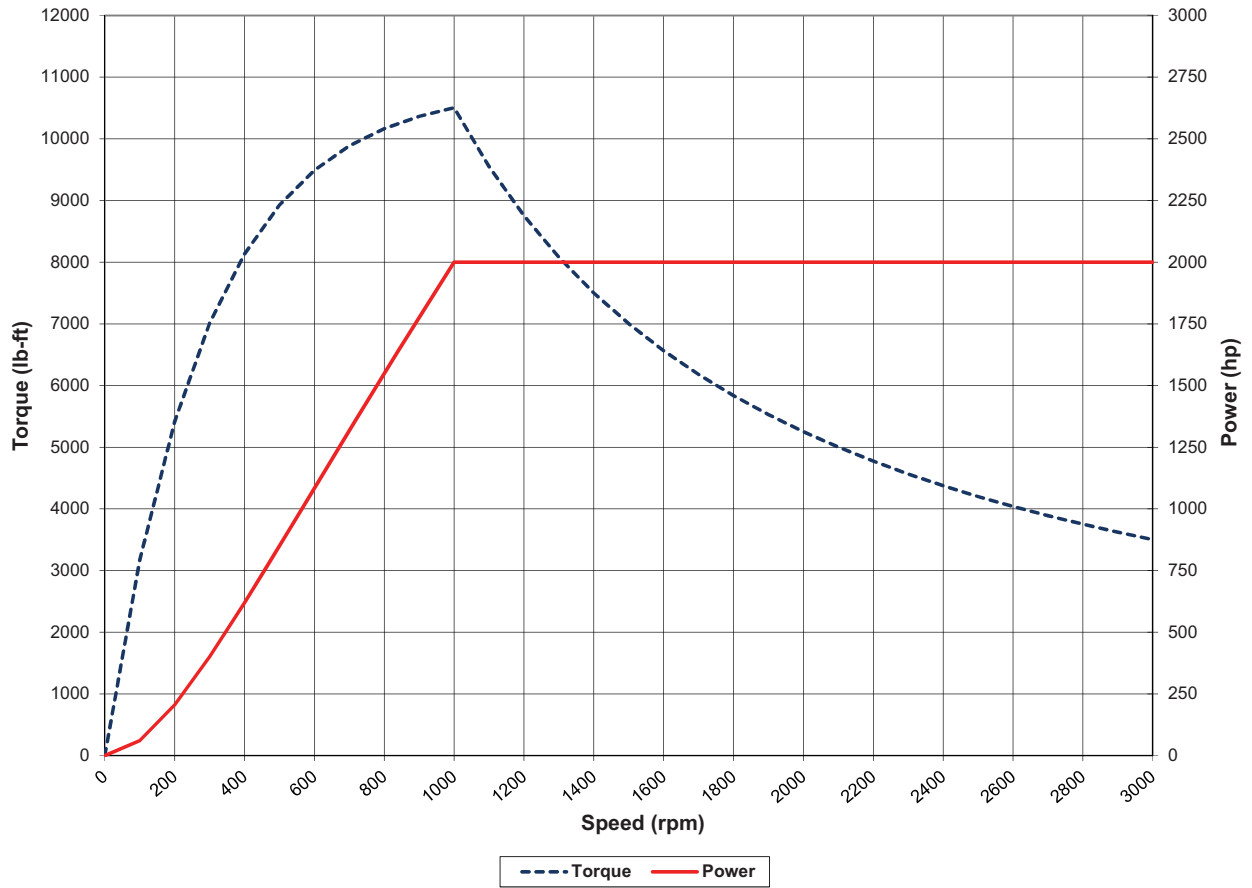

MW-3232 (S.I.)

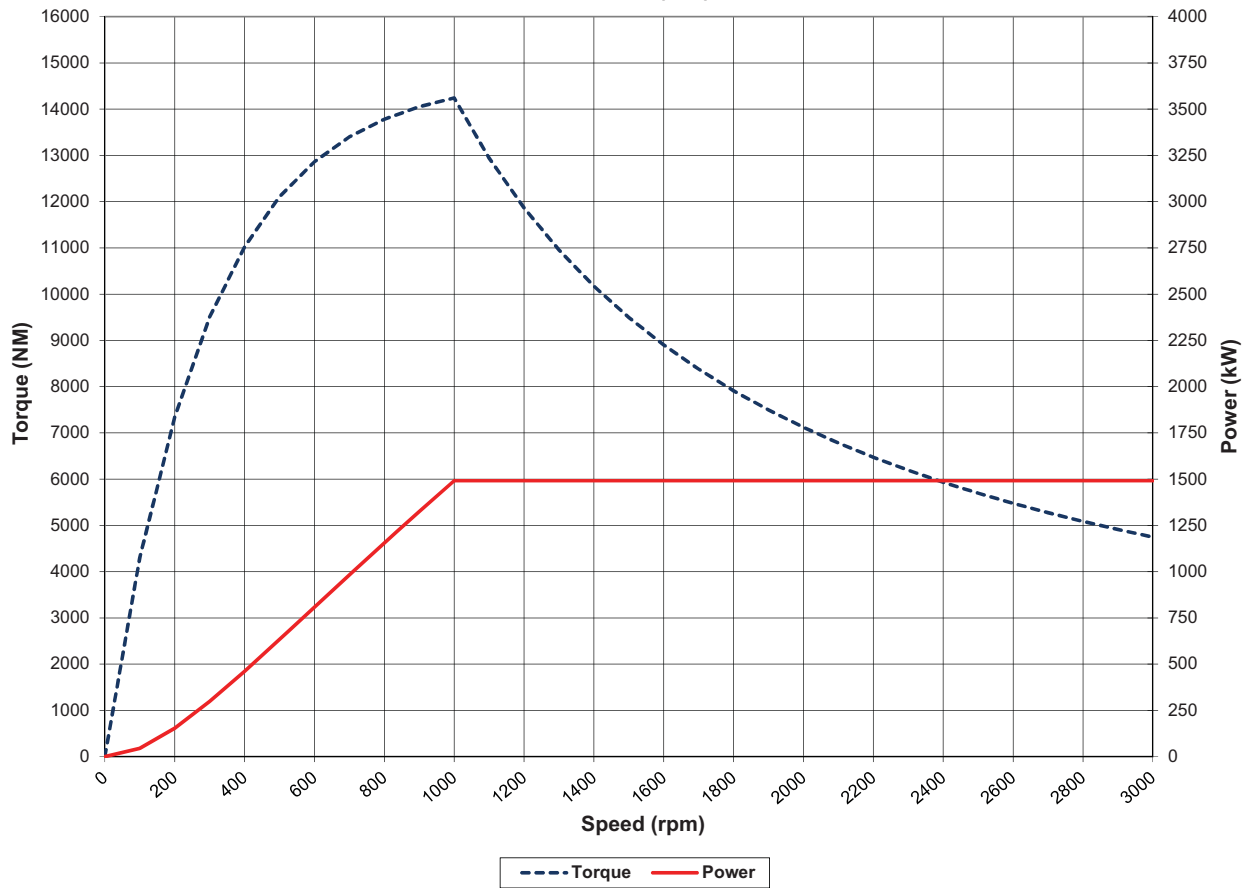

Standard Included Components

Load Cell and Linkage
Cooling Safety Package
Calibration Arm
Calibration Weight Hanger
Companion Flange / Hub Pattern 1910 - US Customary
Shaft End Guard
Magnetic Pickup and 60-tooth Gear
Constant Level Oilers

Everything you need to succeed



Dyne Systems is a division of Taylor Dynamometer
W209 N17391 Industrial Dr., Jackson, WI 53037
(800) 657-0726 www.dynesystems.com

DS2335v001