



DA16 / Engine Dynamometer

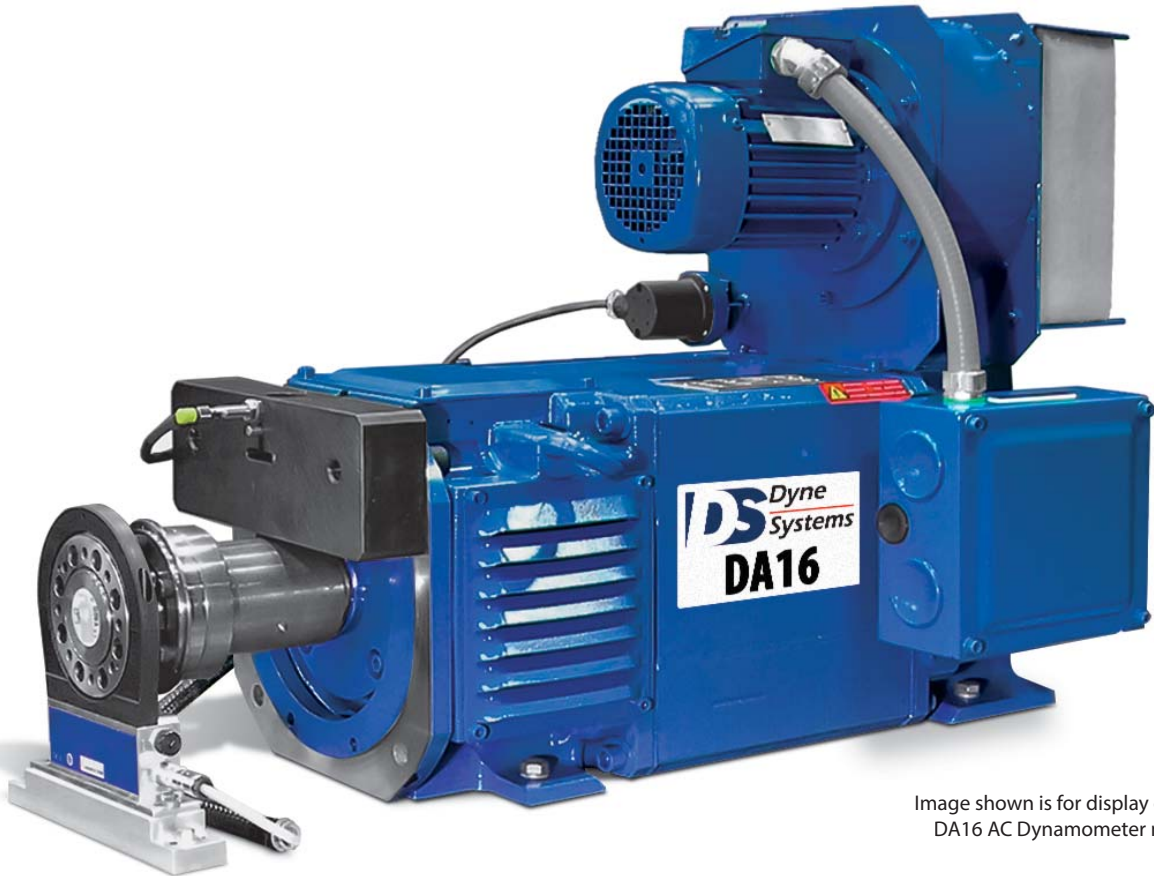


Image shown is for display only, actual DA16 AC Dynamometer may vary.

DA16 Air Cooled AC Dynamometer

Specifications

Power:	16 hp (11.9 kW)
Torque:	42 lb-ft (56.9 Nm)
Maximum Speed:	6,400 rpm
Constant Torque Range:	0 - 2,000 rpm
Constant Power Range:	2,000 - 3,200 rpm
Decreasing Power Range:	3,200 - 6,400 rpm
Rotation:	bi-directional

Recommended Accessories

- Test Stand or Table
- Driveshaft
- Shaft Guard
- Adapter Plate Kit
- Load Bank Configuration (Regenerative Drive Configuration is standard)
- Calibration Weights

Everything you need to succeed

Optional Accessories



Optional T-Slot Table



Optional Calibration Weights



Optional Driveshaft Guard

Various Facility Support Systems and Services Available



Bulk Fuel Storage and Distribution



Coolant Storage and Distribution



Water Recirculation




Design, Project & Construction Management Services




Commissioning, Start-up & Training

DA16 (US Customary)

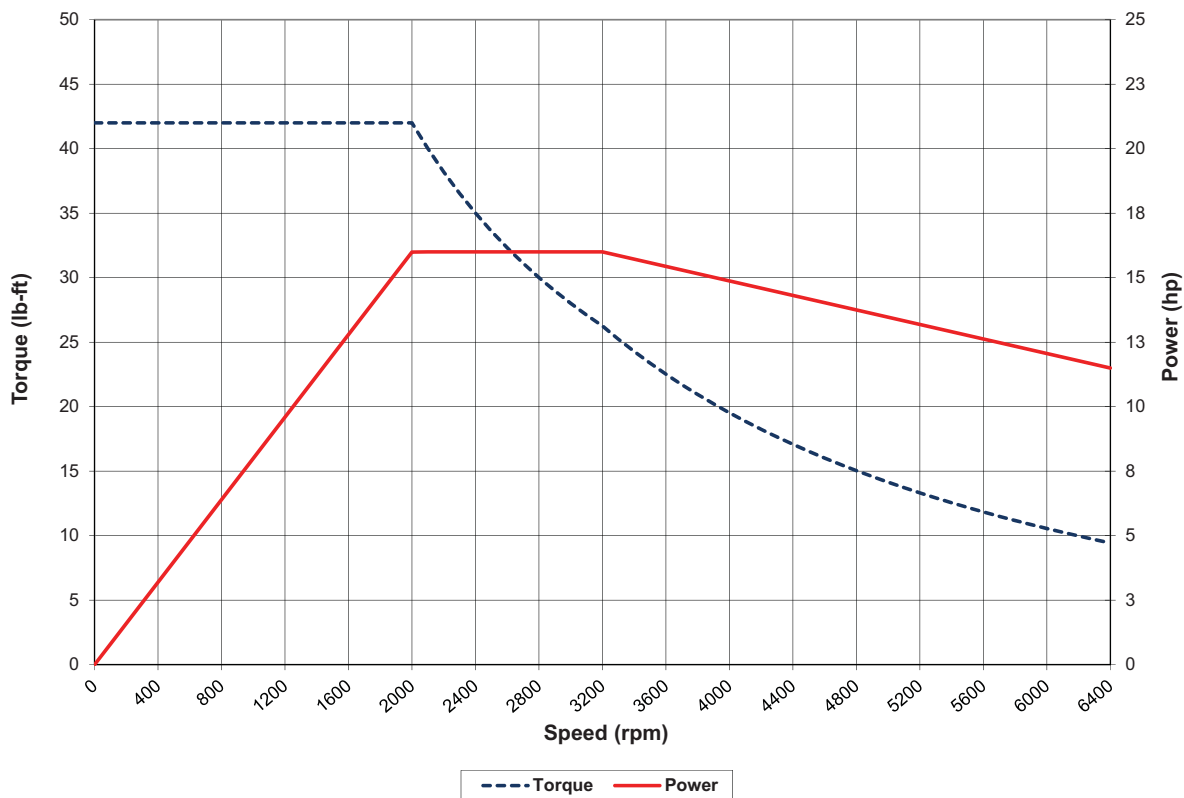

DA16 (S.I.)

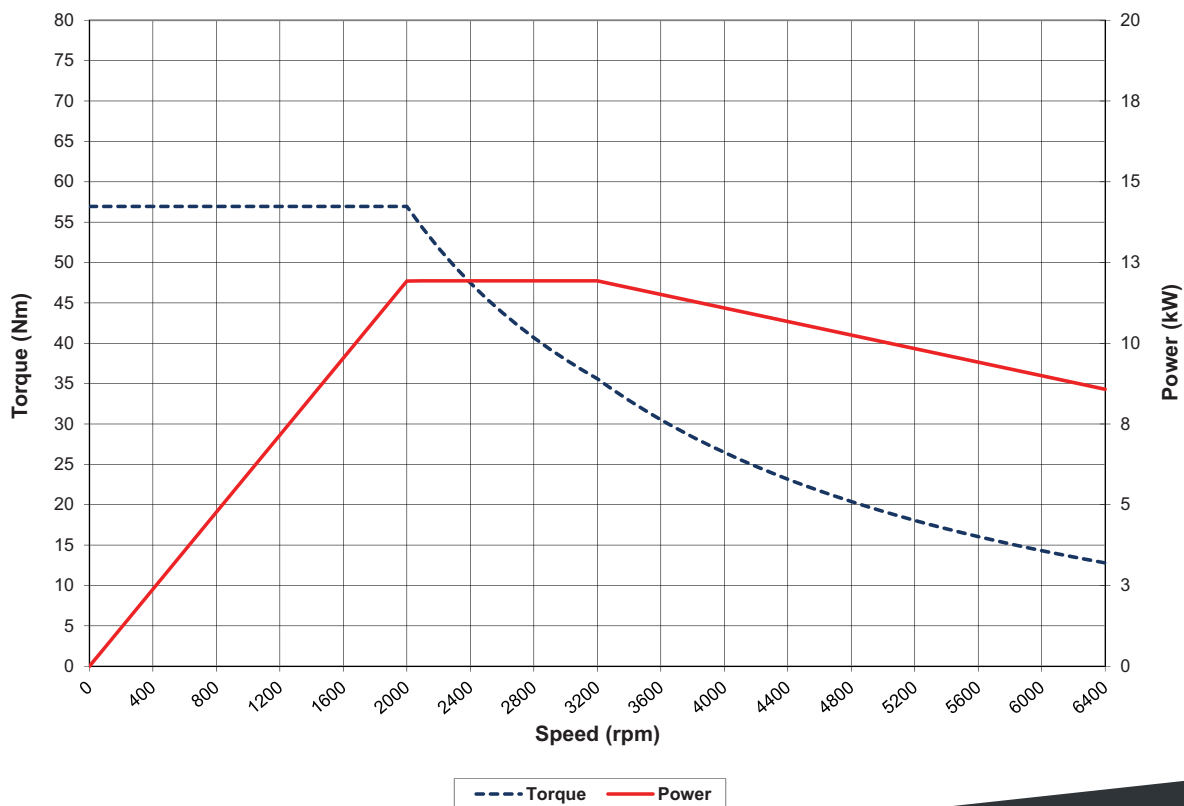

Everything you need to succeed



Dyne Systems is a division of Taylor Dynamometer
 W209 N17391 Industrial Dr., Jackson, WI 53037
 (800) 657-0726 www.dynesystems.com