



DA750 / Engine Dynamometer



Image shown is for display only, actual DA750 AC Dynamometer may vary.

DA750 Air Cooled AC Dynamometer

Specifications

| | |
|-------------------------|------------------------|
| Power: | 750 hp (559 kW) |
| Torque: | 2,626 lb-ft (3,560 Nm) |
| Maximum Speed: | 3,000 rpm |
| Constant Torque Range: | 0 - 1,500 rpm |
| Constant Power Range: | 1,500 - 2,600 rpm |
| Decreasing Power Range: | 2,600 - 3,000 rpm |
| Rotation: | bi-directional |

Recommended Accessories

- Base Kit
- Driveshaft
- Shaft Guard
- Engine Cart
- Adapter Plate Kit
- Charge Air Cooler
- Load Bank Configuration (Regenerative Drive Configuration is standard)
- Calibration Weights

Everything you need to succeed

Optional Accessories



Optional Closed Loop Cooling Center



Optional Charge Air Cooler



Optional Engine Cart



Optional Driveshaft Guard


Various Facility Support Systems and Services Available



Bulk Fuel Storage and Distribution



Coolant Storage and Distribution



Water Recirculation




Design, Project & Construction Management Services




Commissioning, Start-up & Training

DA750 (US Customary)

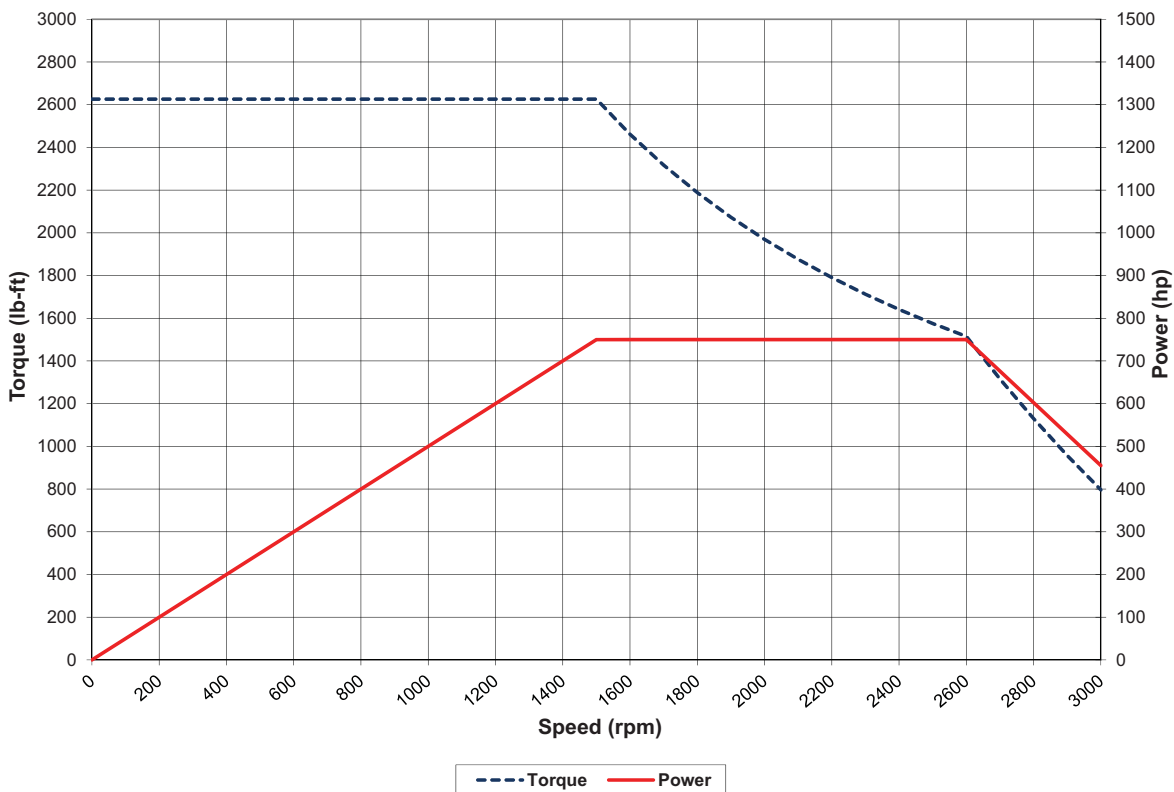

DA750 (S.I.)

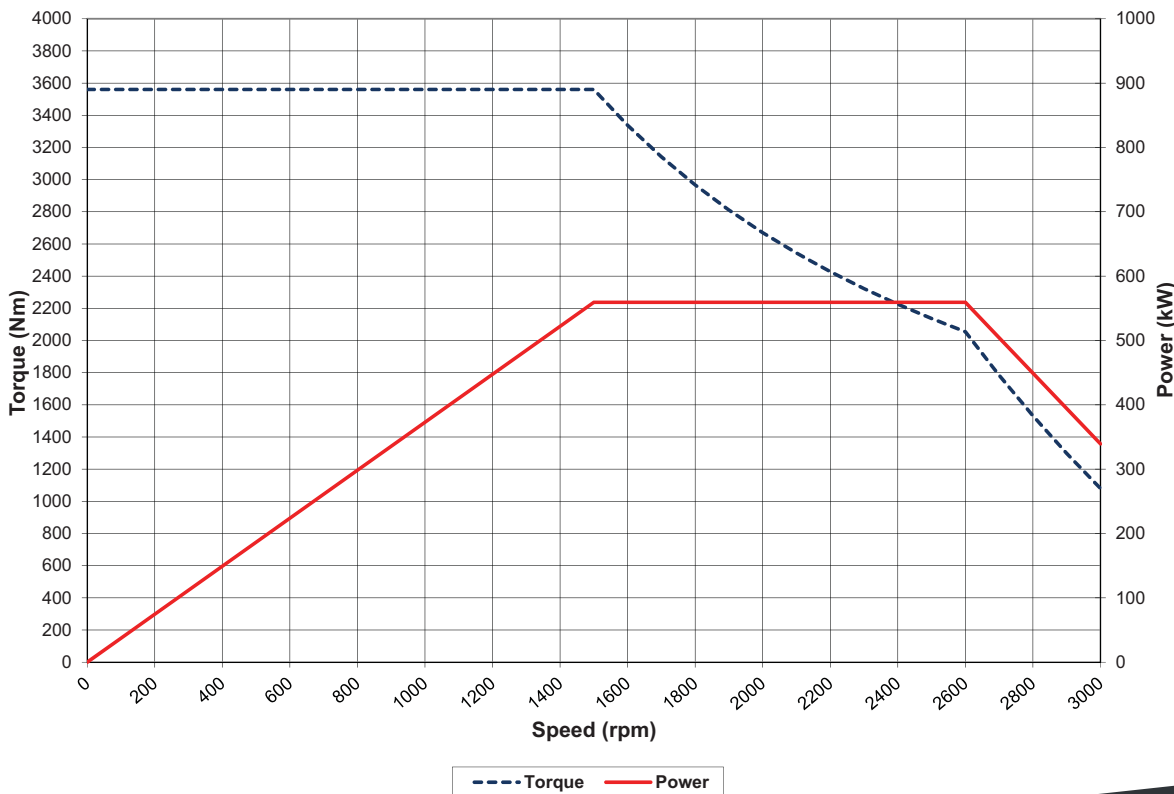

Everything you need to succeed



Dyne Systems is a division of Taylor Dynamometer
 W209 N17391 Industrial Dr., Jackson, WI 53037
 (800) 657-0726 www.dynesystems.com