



1310 Driveshaft / Engine Dynamometer

Specifications

- Maximum Recommended Continuous Torque 400 lb-ft (542 Nm) with no angular misalignment and $2^\circ \pm 1^\circ$ slope (parallel offset between 0.5 and 1.5 in. (13 and 40 mm))
- Minimum Elastic Limit 4,400 lb (5,966 kg) represents the maximum torque load the universal joint will transmit instantaneously without brinelling bearings or yield in any part
- Maximum Allowable Speed 5,500 rpm
- Dynamically-balanced
- Weight 36 lb (16 kg)

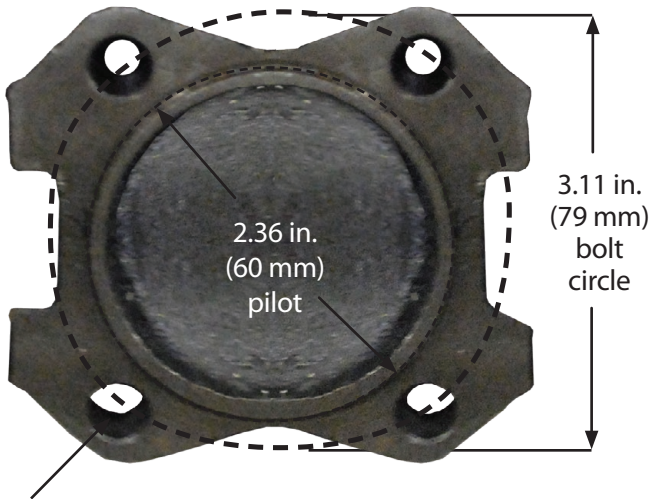

(4) holes 0.37 in. (9.6 mm) diameter

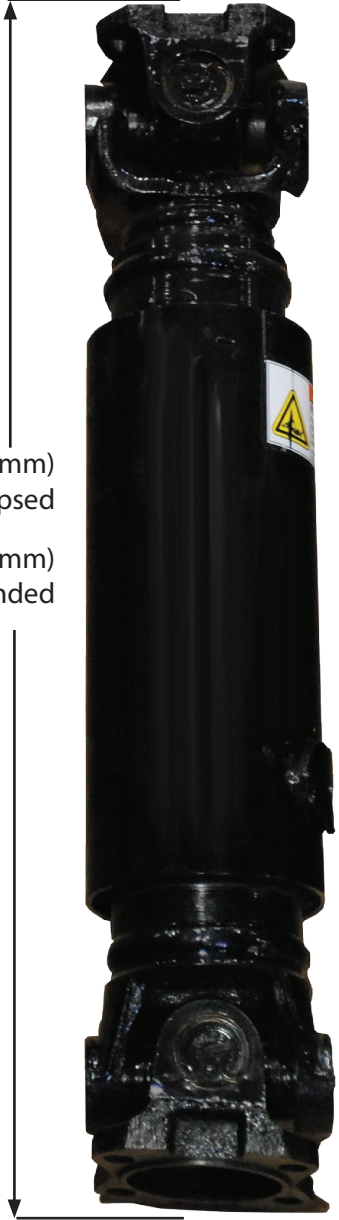

28.5 in. (724 mm)
minimum collapsed

31.8 in. (808 mm)
maximum extended

Everything you need to succeed