



## MW-3232 / Engine Dynamometer



Example Model Shown  
(Image may not depict all standard  
included components)

## MW-3232 Eddy Current Dynamometer

### Specifications

Power:	2,000 hp (1,491 kW)
Max Torque at Base Speed:	10,504 lb-ft (14,242 Nm)
Base Speed:	1,000 rpm
Max. Speed:	3,000 rpm
Construction Type:	Dry Gap
Rotor Inertia:	4,646 lb-ft <sup>2</sup> (195.78 kg-m <sup>2</sup> )
Coolant Required at Max. Power:	200 gpm (757 lpm)
Coolant Inlet (Min-Max):	55-100 psi (378-689 kPa)
Coolant Inlet Temperature Max:	90°F (32.2°C)
Shipping Weight (estimate):	18,000 lb (8,165 kg)
Companion Flange / Hub Pattern:	1910 - US Customary
Coil Voltage / Hot Amperage:	250V / 7.82 amps
Rotation:	bi-directional

*For overhung loads, such as a belt or gear drive, please contact Dyne Systems to ensure that the system will meet the required performance needs.*

### Recommended Accessories

- Driveshaft - 1910
- Torsional Coupling - 1910
- Flywheel Adapter Plate Kit
- Driveshaft Guard
- Sub-Base Kit
- Engine Cart
- Air or Electric Starter
- Engine Cooling Column
- Charge Air Cooler
- Water Recirculating System

**Everything you need to succeed**

# Optional Accessories



Optional Manual Shaft Lock



Optional Closed Loop Cooling Center



Optional Charge Air Cooler



Optional Driveshaft Guard



Optional Engine Cart

# Various Facility Support Systems and Services Available



Bulk Fuel Storage and Distribution



Coolant Storage and Distribution



Water Recirculation




Design, Project & Construction Management Services




Commissioning, Start-up & Training

MW-3232 (US Customary)

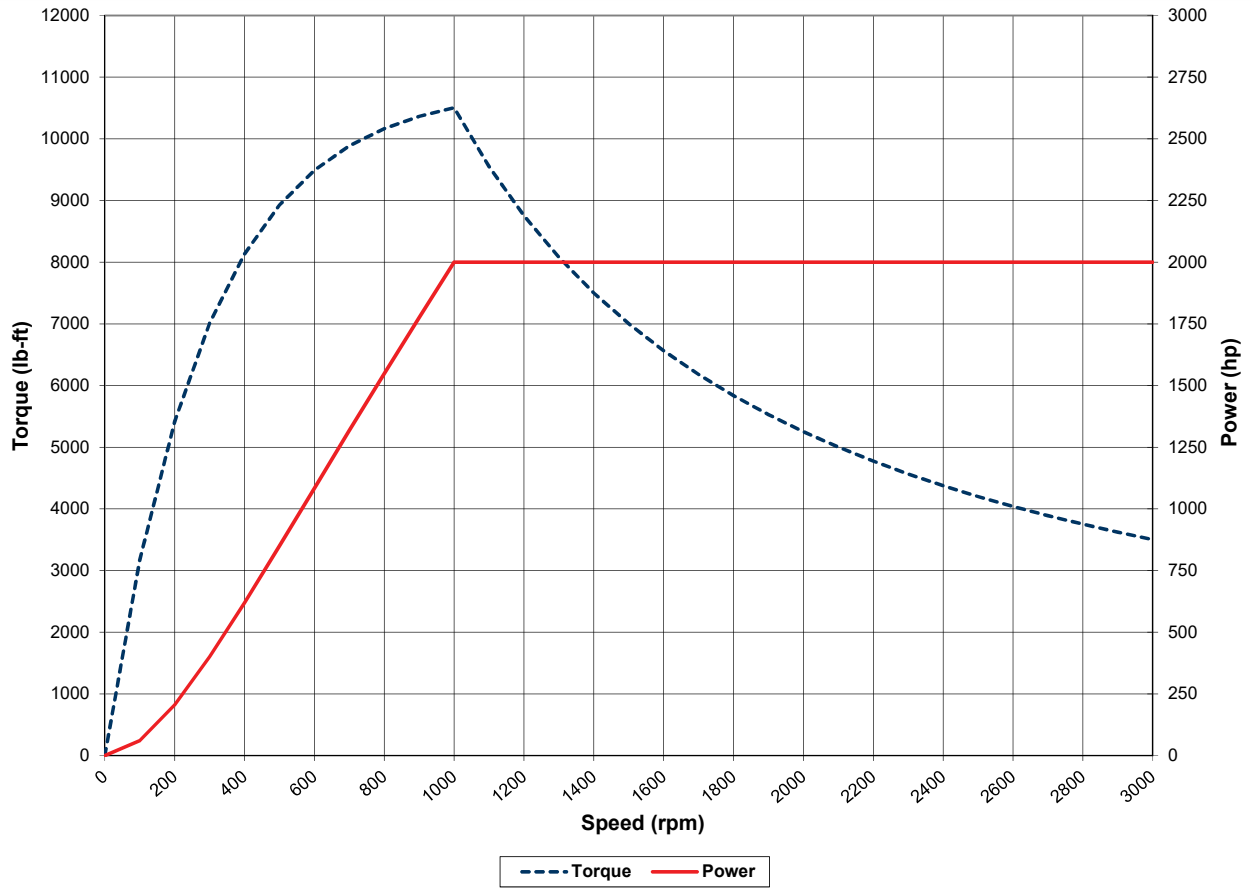

MW-3232 (S.I.)

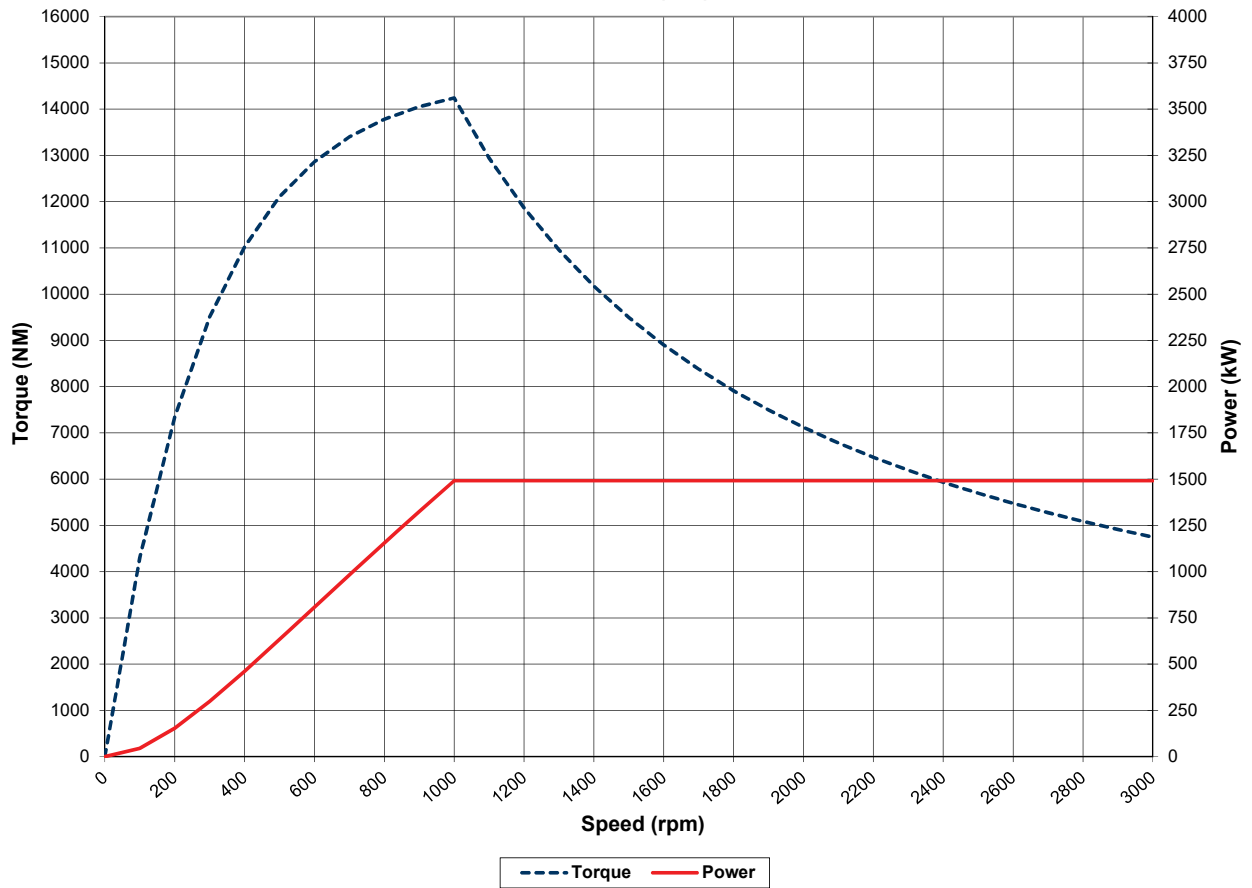

## Standard Included Components

Load Cell and Linkage  
Cooling Safety Package  
Calibration Arm  
Calibration Weight Hanger  
Companion Flange / Hub Pattern 1910 - US Customary  
Shaft End Guard  
Magnetic Pickup and 60-tooth Gear  
Constant Level Oilers

*As a safety precaution, Dyne Systems recommends a torsional analysis to uncover any potential torsional problems that exist for each application. This analysis will identify any torsional issues (frequencies) that should be fixed prior to operation. Excessive linear vibration may also create problems that must be mitigated for continued operation. It is the customer's responsibility to ensure that these vibration issues are addressed upon application of the dynamometer. Equipment failures attributed to linear or torsional vibration are not warrantable.*

***Everything you need to succeed***



Dyne Systems is a division of Taylor Dynamometer  
W209 N17391 Industrial Dr., Jackson, WI 53037  
(800) 657-0726 [www.dynesystems.com](http://www.dynesystems.com)

DS2335v002