
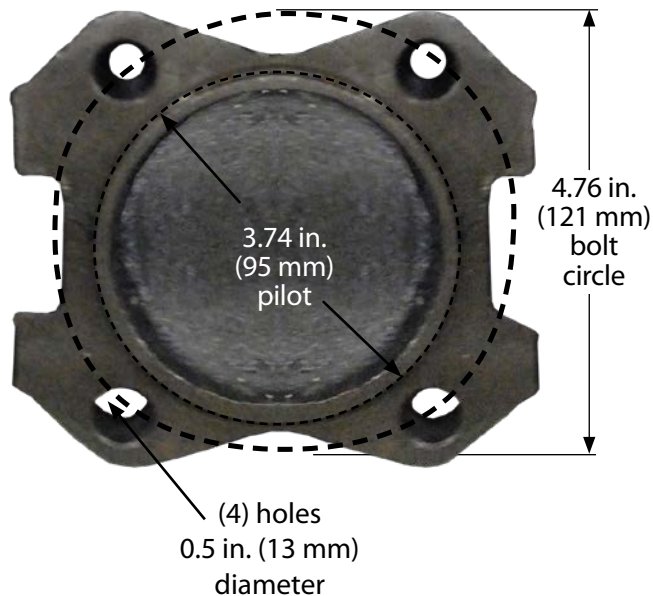


## 1550 Driveshaft / Engine Dynamometer

### Specifications

- Maximum Recommended Continuous Torque 1,400 lb-ft (1,898 Nm) with no angular misalignment and  $2^\circ \pm 1^\circ$  slope (parallel offset between 0.5 and 1.5 in. (13 and 40 mm))
- Minimum Elastic Limit 4,400 lb-ft (5,966 Nm) represents the maximum torque load the universal joint will transmit instantaneously without brinelling bearings or yield in any part
- Maximum Allowable Speed 5,000 rpm
- Dynamically balanced
- Weight 36 lb (16 kg)



28.5 in. (724 mm) minimum collapsed

31.8 in. (808 mm) maximum extended

*Everything you need to succeed*